


LED Flood Light

BRIGHTEN YOUR LIFE

EFL04

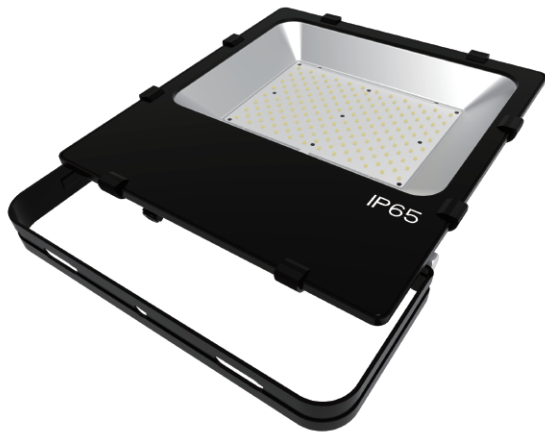

EFL04

LED Flood Light

Pure Aluminum(E-clean version)



CE RoHS IP65 5 YEAR WARRANTY 100% ALUMINUM 100% PURE ALUMINUM (E-CLEAN VERSION) Rated voltage 220-240V Frequency 50-60Hz $\pm 40^{\circ}\text{C}$ -30°C

1.Features

- Replace conventional Flood Lights
- Precision Pure Aluminum Housing
- Fade Resistant Powder Coat Finish
- Easy Installation
- Smooth surface, dustproof, easy clean.
- CE ROHS listed

2.Application

- Stadiums Lighting
- Building Exterior Lighting.
- Amusement Park Lighting.
- Airport Lighting.
- Bridge Lighting.
- Tunnel Lighting.

By using our 100W Flood Light to replace 300W Metal Halide bulb for Stadiums lighting fixtures, the customer is now able to save a lot per month from his electric bill.




Replace



100W LED = 300W MH

3.Product Dimensions

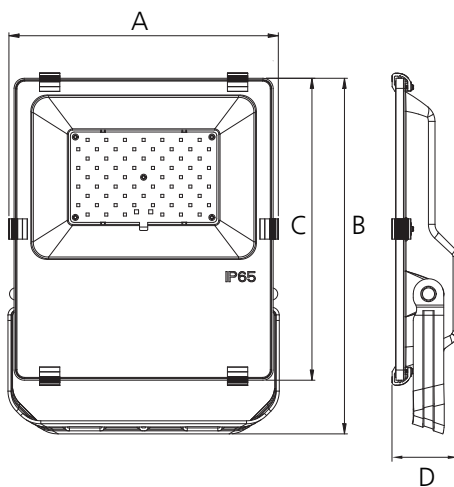

Model NO.	Size A(mm)	Size B(mm)	Size C(mm)	Size D(mm)
EFL04-50W	265.2	350.3	297.5	69
EFL04-100W	308.2	397.4	338	69
EFL04-150W	347.2	441.3	373	69
EFL04-200W	385.2	499.9	420	69

4. Parameter

Model NO.	Power (W)	Clear glass	
		Lumens	Lm/W
ELF04-50W	50	7000	140
ELF04-100W	100	14000	140
ELF04-150W	150	21000	140
ELF04-200W	200	28000	140

Above lumens based on 4000K Ra : 80

 Dimmable
  Emergency
  Motion sensor

L90B50 @Ta 25°C : 50000h

AC Input : 220-240V 50/60Hz

Light Source : 3030

CRI Range : 80

CCT Range : WW(3000K) NW(4000K) DW(5000K) CW(6500K)

Light Efficiency : 140Lm/W

Beam Angle : 120°


Waterproof : IP65

Recommended Installation Height : 3-20M


PF:≥0.95 THD<20% Power Efficiency:≥0.9

Temperature : (Storage : -40~+85°C) (Operating : -30~+40°C)


5. Installation

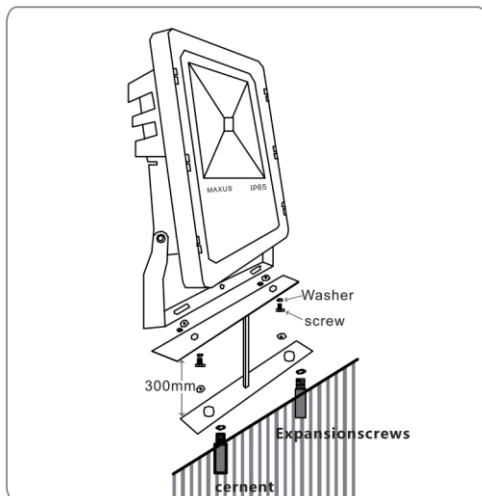


1. Install the lamp by the stand on the ground.

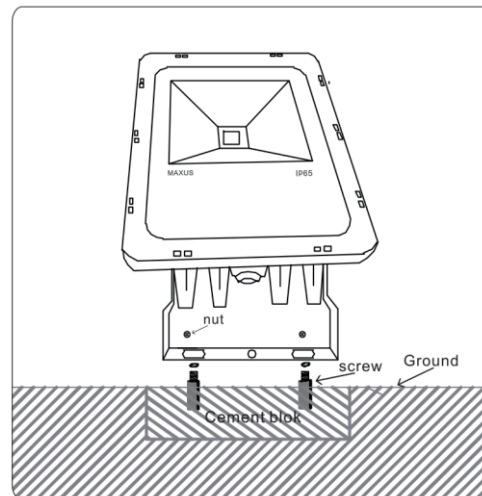

2. Install lamp directly.

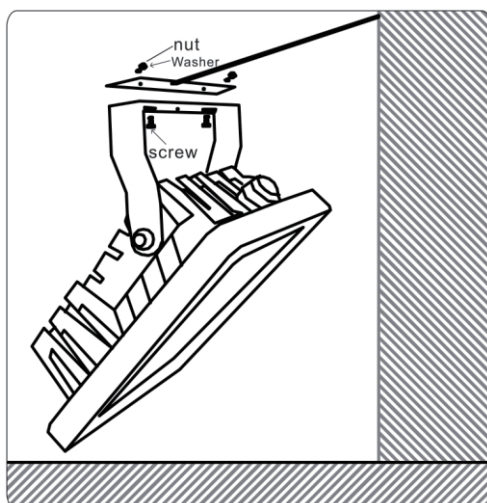


3. Hang the lamp by the stand.

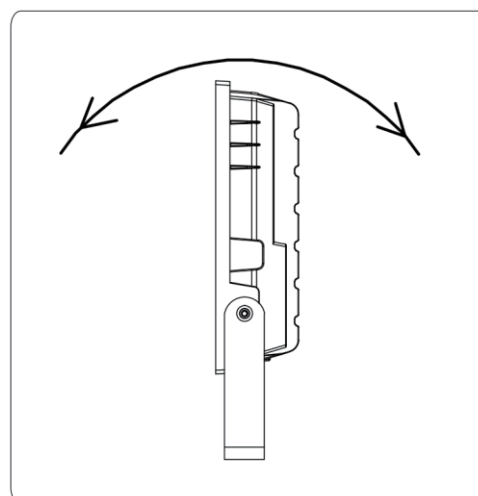

4. The angle of the lamp is adjustable.

6.Packaging

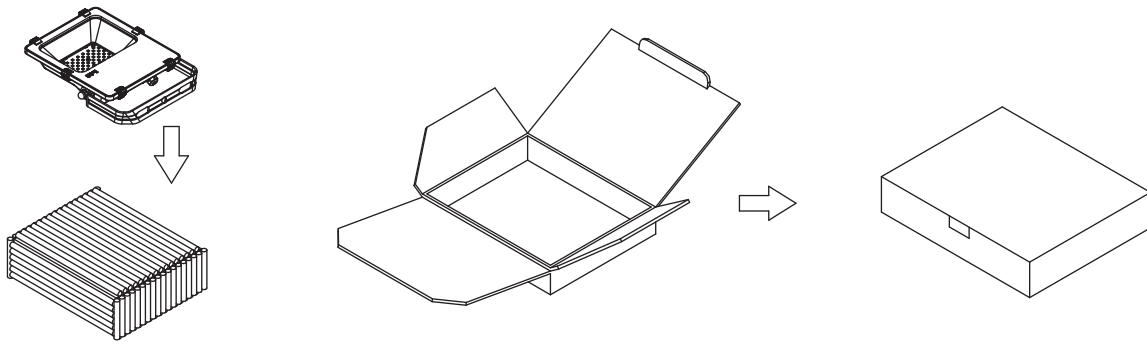

Model No.	Single Box	Pcs/ctn	N.W.(kg)	G.W./ctn(kg)	Meas(mm)
ELF04-50W	1	5	2.2	13.79	525x410x368
ELF04-100W	1	1	3.34	3.86	440x355x102
ELF04-150W	1	1	4.08	4.75	490x390x102
ELF04-200W	1	1	4.5	5.25	530x435x102