


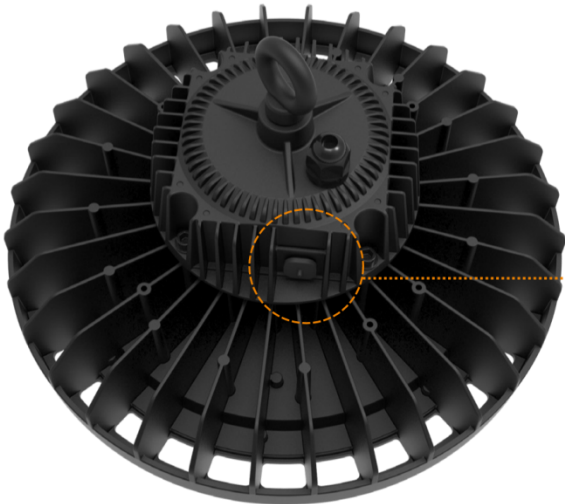

• Power Adjustable

ON			
1	2	3	
Power	①	②	③
200W	ON	OFF	OFF
150W	OFF	ON	OFF
100W	OFF	OFF	ON

Key Features

- Power adjustable
- High Efficiency up to 150lm/w

Applications

- Warehouse
- Industrial Facility
- Exhibition Center
- Shopping Mall
- Gymnasium
- Airport
- Toll Station and so on.


Certifications




Specifications

Model No.	HB07-200W（Power DIP design）	
Power DIP	200W-150W-100W	
Product Dimension	Φ320*188mm	
Standard Efficiency	130±10lm/W Ra>80	
Luminous Flux (±10%)	200W(26000±2000lm) - 150W (19500±1500lm) - 100W (13000±1000lm)	
LED Quantity	368 PCS 1W SMD2835	
High Efficiency	150±10lm/W Ra>70	
Luminous Flux (±10%)	200W(30000±2000lm) - 150W (22500±1500lm) - 100W (15000±1000lm)	
LED Quantity	368 PCS 1W SMD2835	
High Efficiency Plus	180±10lm/W Ra>70	
Luminous Flux (±10%)	200W(36000±2000lm) - 150W (27000±1500lm) - 100W (18000±1000lm)	
LED Quantity	550 PCS 1W SMD2835	
CCT	3000K/ 4000K/ 5000K/ 6000K	
Ingress Protection	IP65	
Color Rendering Index	Ra>70/ 80	
Beam Angle	60°/ 90°/ 110°	
Input Voltage	AC 220-240V/100-277V	
Power Factor	>0.9	
Frequency	50-60Hz	
Driver Type	Constant Current (CC)	
Luminaire Net Weight	4.3kg	
Packing Information	1PCS/CTN	
Export Carton Size	38*38*23cm	
Gross Weight	5.5kg	
Material	Housing	Aluminum Alloy
	Optics	PC
Finish	Powder Coating	
Fixture Color	Black	
Mounting Option	Hook Hanging/ Ceiling Mounting	
Storage temperature range	-30℃ - +70℃	
Operating temperature range	-30~+45℃	
Lifetime	50.000 hours	
LED Device Lifetime	L90/ B50	
Warranty	3 Years	
Dimmable	1-10V dimmable	
Intelligent Control	IP65 microwave motion sensor	
Optional Accessories	1-10V dimmable	
	IP65 microwave motion sensor	
	Safety rope (0.5m length)	

Photometry

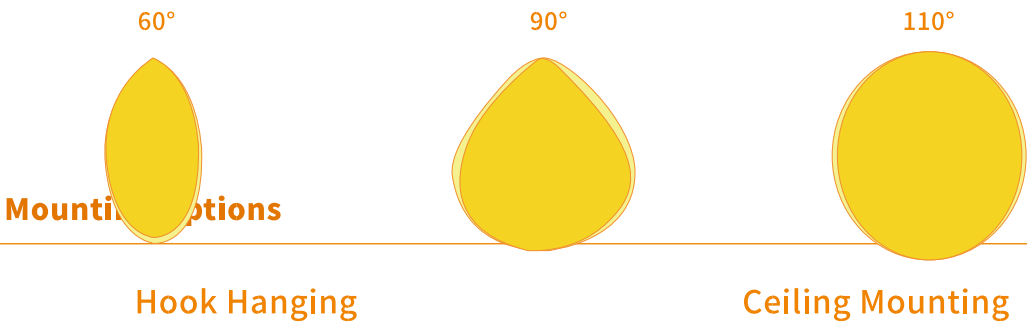

Dimensions

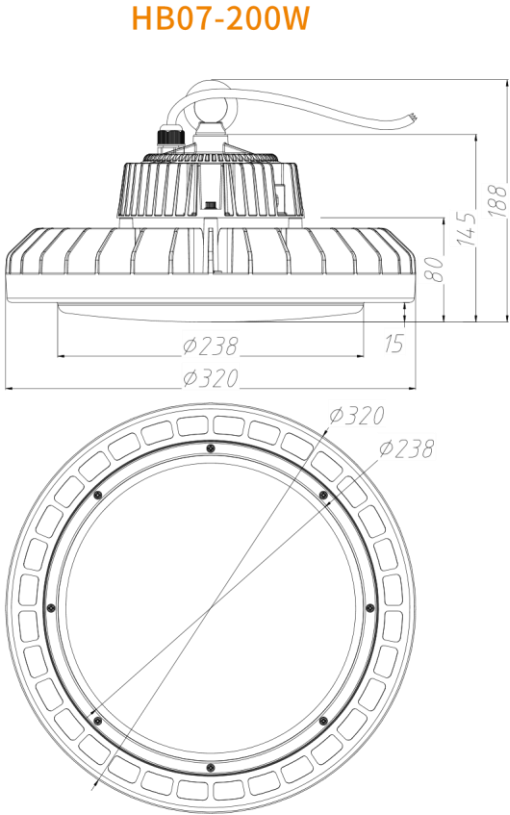

Accessories

