

Pilot Version Tri-proof TP01

TP01 has the most uniform illumination and wide lighting distribution thanks to the ultra slim design, it's recommended as an ideal solution to a lot of applications such as parking lots, factory, low-racked warehouses. Patent pull-out endcap design makes it extremely fast opening and saving you labor cost on installation and maintenance.



Feature

- Through-wiring 3x1.5mm²
- High efficiency up to 160lm/W
- Tool-free and fast installation
- Smart PIR&Microwave sensor solution
- Modular and integrated design for maintenance



Toolless rotatable endcap
Fast Installation
3 wires through



Replaceable module design
according to new ERP regulation

power adjustable


Simple connection
push-on connector

160LM/W high
efficiency

150° illumination
surface




Dimension

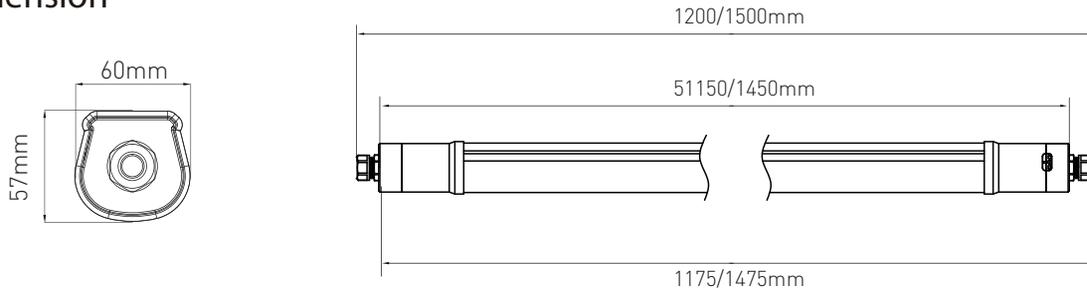

Parameter

Model NO. / Length	Power adjustable(W)	Multiple Lumens 160lm/W	AC Input
TP01 / 1200mm	23/33	3680/5280	220-240V 50/60Hz
TP01 / 1500mm	28/40	4480/6400	Light Source
			SDCM<3
			CRI Range
			80 / 90 / 95
			CCT Range
			WW(3000K) NW(4000K) DW(5000K) CW(6500K)
			Light Efficiency
			160lm/W
			Beam Angle
			150°
			Lifespan
			102000h L80B10 / 118000h L80B50 @Ta 25°C
			Size
			60(W)*57(H)
			Waterproof
			IP65 & IK08
			Warranty
			5 years

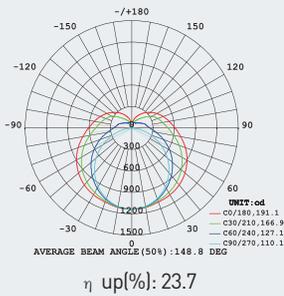

Notes:

- All values in +25°C ambient temperature
- Luminous flux tolerance +-5%, power tolerance +-5%.


Accessory




Accessories	IMAGE	DESIGNTION	MATERIAL	QUANTITY	ACCESSORY USE
Standard	01	Ceiling Mounting Bracket	Stainless steel	2PCS	For ceiling mounting and suspension using
Standard	02	Screw	Stainless steel	2PCS	For ceiling mounting using
Optional	03	Suspension Cable	Stainless steel	2PCS	For suspension using
Optional	04	Waterproof Rubber Plug	PC	1PCS	For through-wiring using
Optional	05	M20 Connector	PC	1PCS	For through-wiring using

Wiring

- Standard Power Adjustable

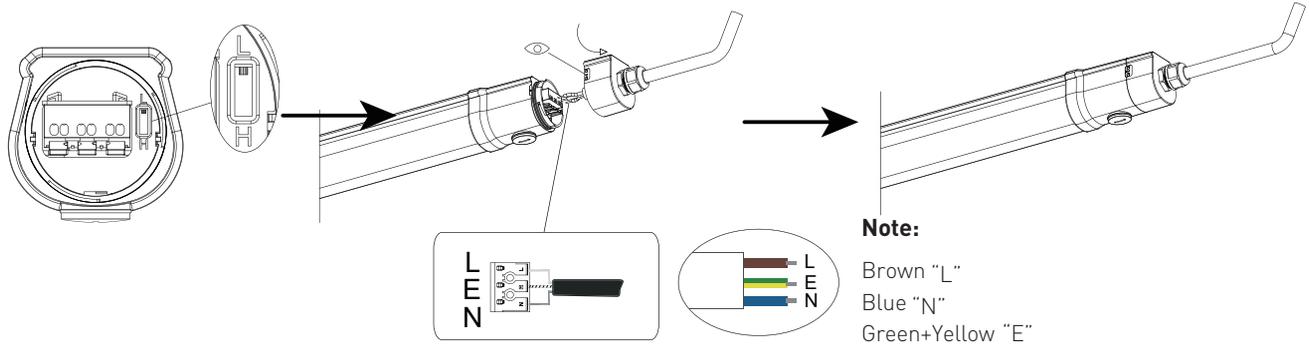


- Through-wiring

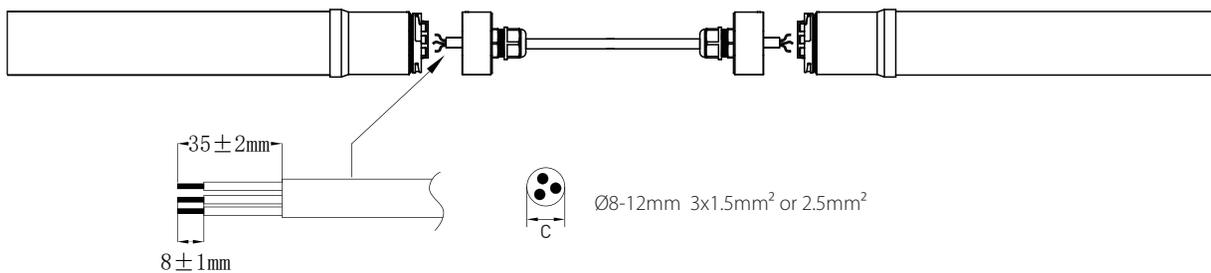


Installation

1 Ceiling Mounting

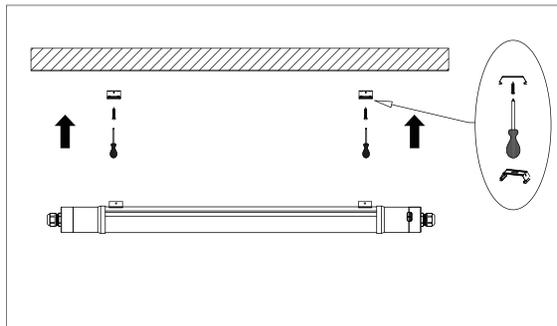

2 Suspension

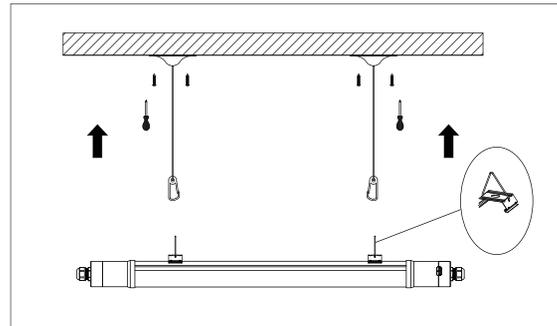

■ Please Note: All the operations must be in the condition of power off

■  The luminaires are intended for indoor use. If you don't understand anything, please consult the sales staff.

Attention

This specification is for reference only, we reserve the right to change without notice. If you need the updated info, please contact local distributors or visit our website at <http://www.ervan.cn>

This product is non-resistant to some chemical substances, please contact the manufacturer for the details.

Statement

According to the International Standard of LED luminaire, here ERVAN formally claims that ERVAN LED Tri-proof (Weather proof) series products is only allowed to be applied to indoor neutral environment. Meanwhile ERVAN promises full warranty for the products.

Any severe environment application including high/low temperature, high humidity, high salinity, high-ammonia etc. is not permitted without the official confirmation from the manufacturer. If any misapplication happens, the warranty policy is no longer guaranteed.

ERVAN reserves the right of final explanation.